



BT137 Series
8A TRIACs
4 Quadrants TRIACs




ShenZhenHanKingyuan
Electronic CO.,Ltd

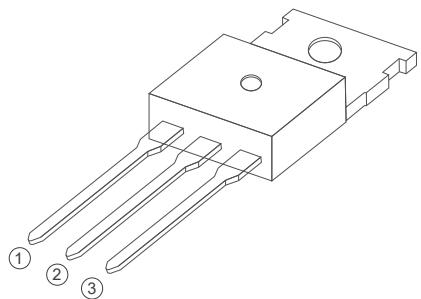


TO-220C

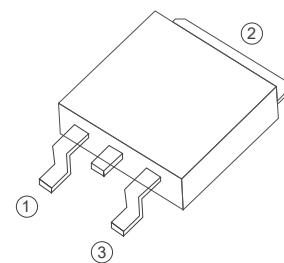


TO-252

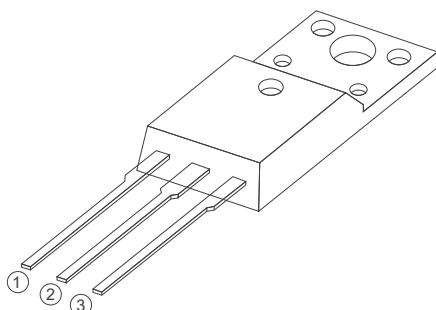


TO-220F Insulated

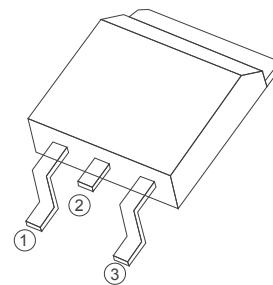

TO-263

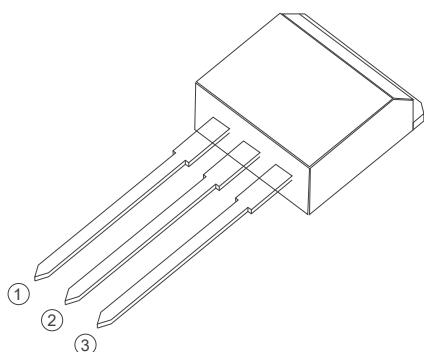


TO-262

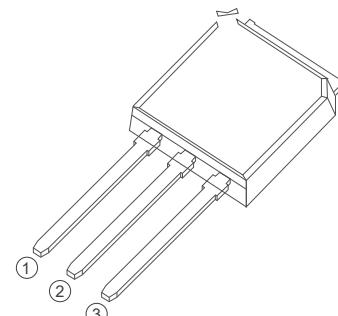

TO-251

FEATURES

- > IT(RMS): 8A
- > VGT: 1.5V
- > VDRM VRRM:800V

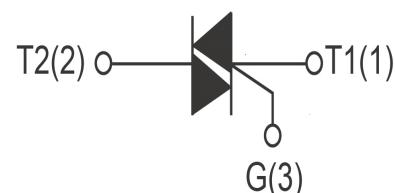

APPLICATIONS

Washing machine, vacuums, massager, solid state relay, AC Motor speed regulation and so on.

Absolute Maximum Ratings ($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
VDRM VRM	Repetitive Peak Off-State Voltage	BT137-600	600	V
		BT137-800	800	V
IT(RMS)	R.M.S On-State Current	$T_c=110^\circ\text{C}$	8	A
ITSM	Surge On-State Current	$t_p=16.7\text{ms}/t_p=10\text{ms}$	80/84	A
I^2t	I^2t for fusing	$T_p=10\text{ms}$	30	A^2s
PG(AV)	Average Gate Power Dissipation	$T_j=125^\circ\text{C}$	1	W
IGM	Peak Gate Current	$T_j=125^\circ\text{C}$	4	A
T_j	Operating Junction Temperature		$\sim 40\sim 125$	$^\circ\text{C}$
TSTG	Storage Temperature		$\sim 40\sim 150$	$^\circ\text{C}$

Electrical Characteristics ($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Value				Unit
			D	E	F	G	
IDRM	Repetitive Peak Off-State Current	$T_j=25^\circ\text{C}$	≤ 5				uA
		$T_j=125^\circ\text{C}$	≤ 1				mA
IRRM	Repetitive Peak Reverse Current	$T_j=25^\circ\text{C}$	≤ 5				uA
		$T_j=125^\circ\text{C}$	≤ 1				mA
VTM	Forward "on" voltage	$IT=12\text{A}$ $t_p=380\text{us}$	≤ 1.55				V
VGT	Gate trigger voltage	$VD=12\text{V}$, $RL=30\Omega$	≤ 1.3				V
di/dt	Critical-rate of rise of commutation current.	$VD=12\text{V}$ $IGT=0.1\text{A}$	≥ 50				A /us
			≥ 10				A /us
IGT	Gate trigger current	$VD=12\text{V}$ $RL=30\Omega$	≤ 5	≤ 10	≤ 25	≤ 50	mA
			≤ 10	≤ 25	≤ 70	≤ 100	mA
IH	Holding current	$IT=0.2\text{A}$	≤ 10	≤ 25	≤ 30	≤ 60	mA
VGD	Gate non-trigger voltage	ALL	≥ 0.2				V
dv/dt	Critical-rate of rise of commutation voltage	$T_j=125^\circ\text{C}$ $VD=2/3VDRM$ Gate	≥ 5	≥ 10	≥ 50	≥ 200	V/us

FIG1

Maximum power dissipation versus RMS on-state current

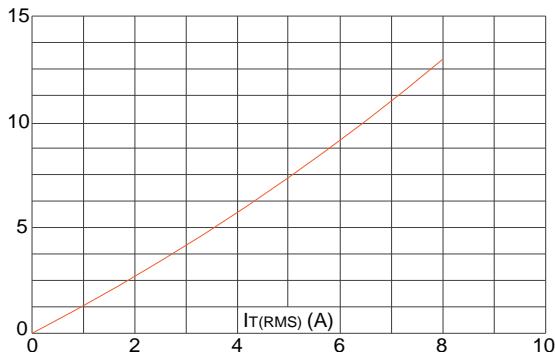


FIG2

RMS on-state current versus case temperature

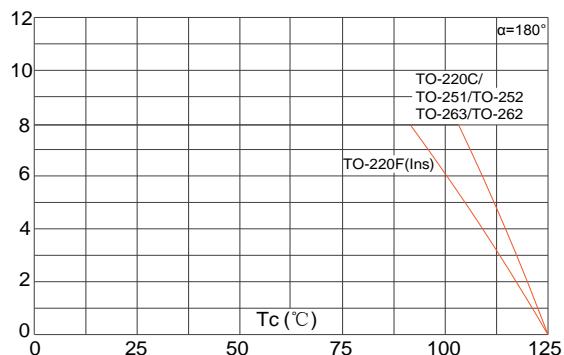


FIG3

Surge peak on-state current versus number of cycles

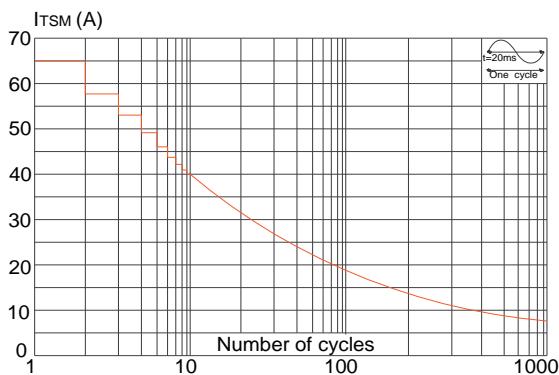


FIG4

On-state characteristics (maximum values)

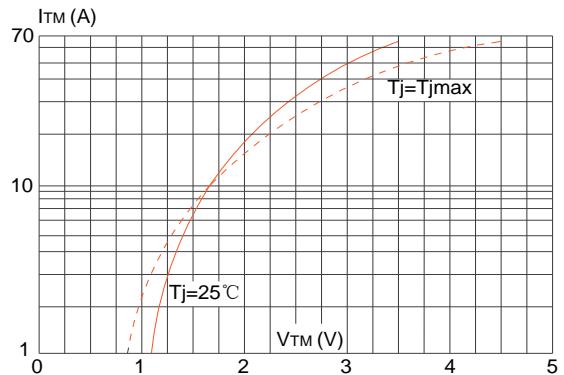


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($\text{d}I/\text{d}t < 100\text{A}/\mu\text{s}$)

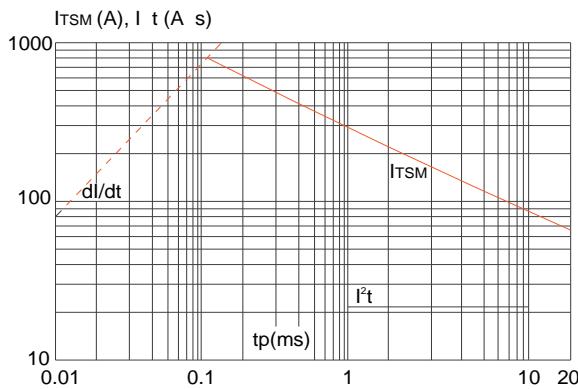


FIG6

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature




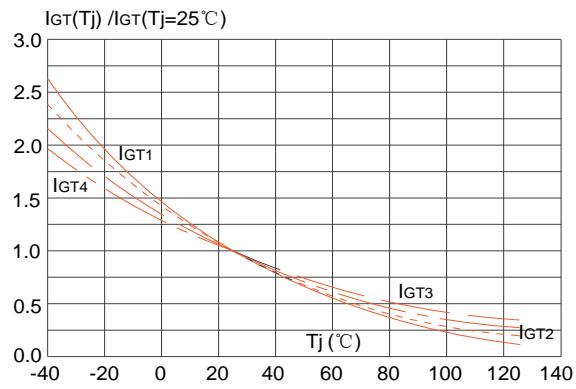


FIG7
FIG.7: Relative variations of holding current versus junction temperature

FIG8
FIG.8: Relative variations of latching current versus junction temperature


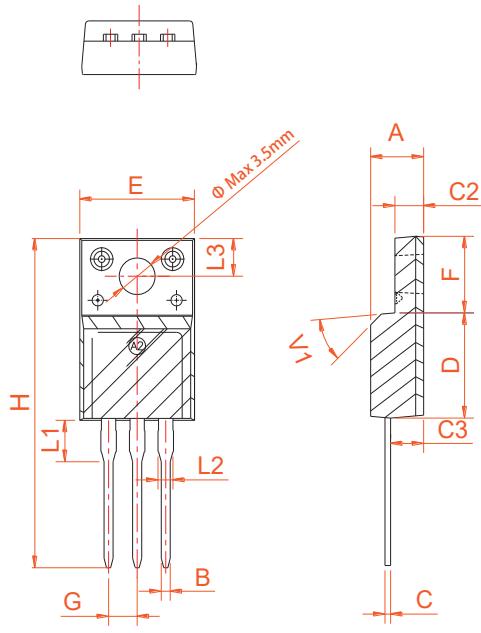
PACKAGE MECHANICAL DATA

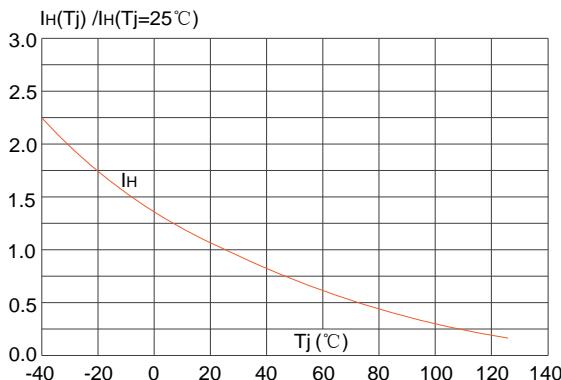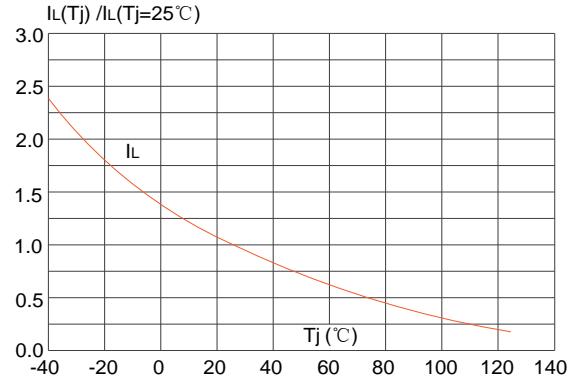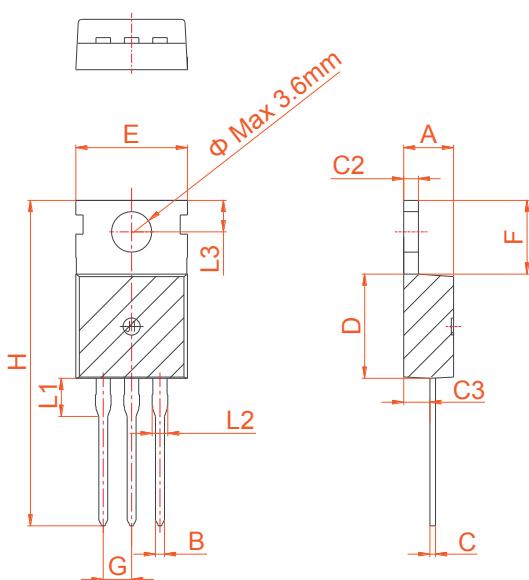

TO-220C


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.90		9.90	0.350		0.390
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
Φ		3.6			0.142	

PACKAGE MECHANICAL DATA




Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.4		9.6	0.37		0.378
D		2.54		0.100		
E	1.20		1.40	0.047		0.055
F	0.75		0.85	0.029		0.033
G			1.75			0.069
H	4.40		4.70	0.173		0.185
J	2.30		2.70	0.091		0.106
K	0.38		0.55	0.015		0.022
L	0	0.10	0.25	0	0.004	0.010
M	1.25		1.35	0.049		0.053

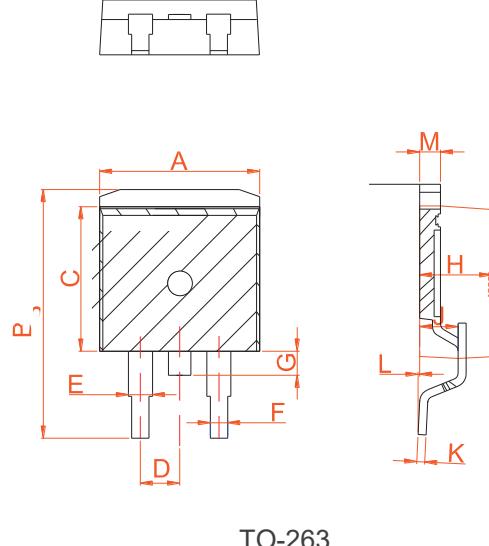


PACKAGE MECHANICAL DATA

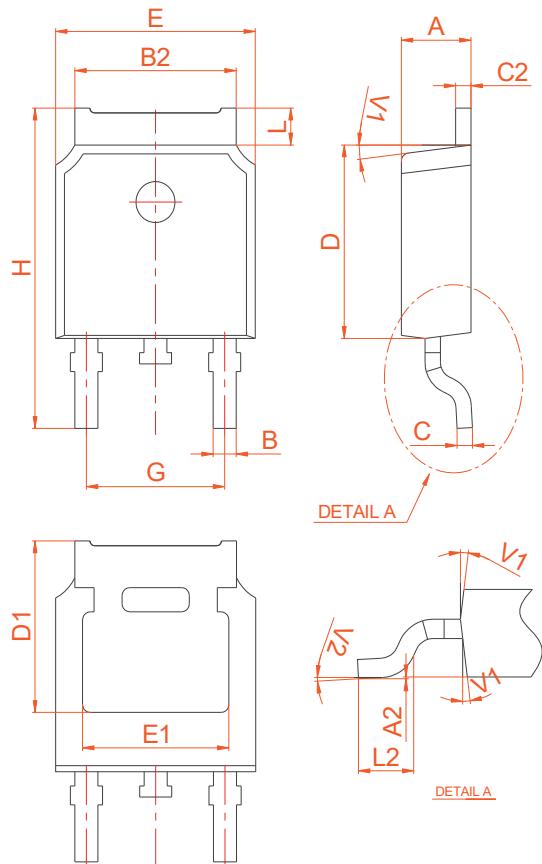


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20			2.40	0.086	
A2	0.03			0.23	0.001	
B	0.55			0.65	0.022	
B2	5.10			5.40	0.200	
C	0.45			0.55	0.018	
C2	2.70			2.90	0.106	
D	6.00			6.20	0.236	
E	6.40			6.70	0.252	
G	4.40			4.70	0.173	
H	9.35			10.6	0.368	
L1	1.30			1.70	0.051	
L2	1.37			1.50	0.054	
L3		0.8				0.031
L4		0.8				0.031
V1			4°			4°
V2		0°		8°	0°	
						8°

TO-252

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.95		10.20	0.392		0.402
B	23.25		23.45	0.915		0.923
C	8.90		9.10	0.35		0.358
D	2.50		2.60	0.098		0.102
E	1.20		1.35	0.047		0.053
F	0.80		0.85	0.031		0.033
G	3.30		3.60	0.130		0.142
H	4.45		4.55	0.175		0.179
J	2.50		2.70	0.098		0.106
K	0.38		0.42	0.015		0.017
L	1.25		1.29	0.049		0.051

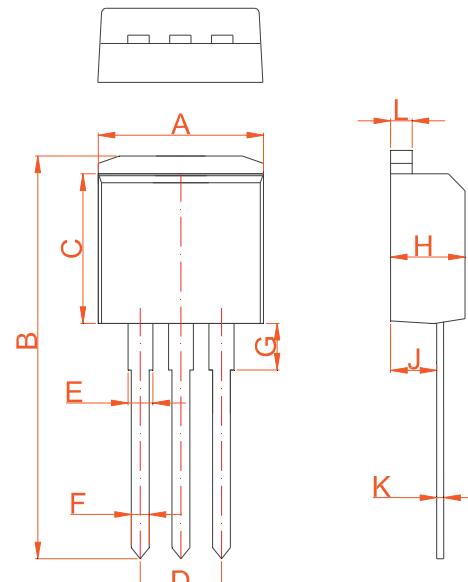

TO-262

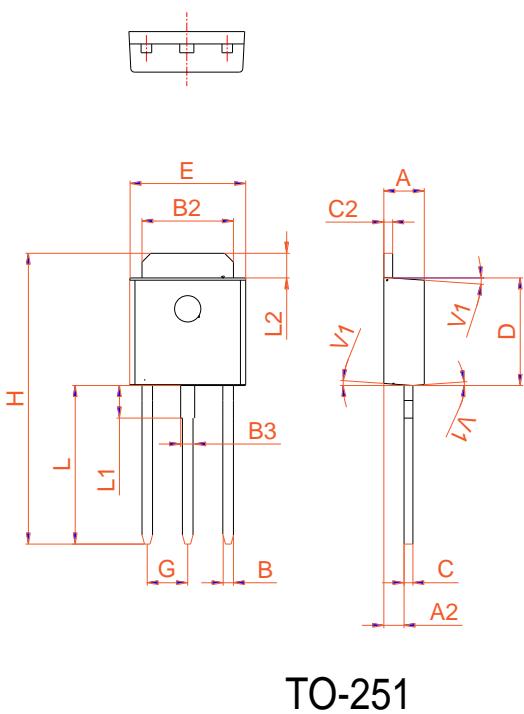

TO-251

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.086		0.095
A2	0.90		1.20	0.035		0.047
B	0.55		0.65	0.022		0.026
B2	5.10		5.40	0.200		0.213
B3	0.76		0.85	0.030		0.033
C	0.45		0.62	0.018		0.024
C2	0.48		0.62	0.019		0.024
D	6.00		6.20	0.236		0.244
E	6.40		6.70	0.252		0.264
G		2.30			0.091	
H	16.0		17.0	0.630		0.669
L	8.90		9.40	0.350		0.370
L1	1.80		1.90	0.071		0.075
L2	1.37		1.50	0.054		0.059
V1		4°			4°	

ShenZhenHanKingyuan
Electronic CO.,Ltd

Information furnished is believed to be accurate and reliable. However, Shenzhen HanKingyuan Electronic assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

The KY logo is a registered trademark of Shenzhen HanKingyuan Electronic.

©2013 Shenzhen HanKingyuan Electronic – Printed in Shenzhen – All Rights Reserved