


产品型号: **LTST-E500TGKT**

发光颜色: **Green (绿色)**

## 1、Features (特征)

- (1). **5.0\*5.0mm** Dimensions SMD  
(**5.0\*5.0mm** 贴片式)
- (2).LOW CURRENT REQUIREMENT  
(低电流驱动)
- (3).LOW POWER CONSUMPTION  
(低功率消耗)
- (4).VERSATILE MOUNTING ON P.C. BOARD PANEL  
(易安装)
- (5).LONG LIFE-SOLID STATE RELIABILITY  
(寿命长)

## 2、product Dimensions(产品尺寸)

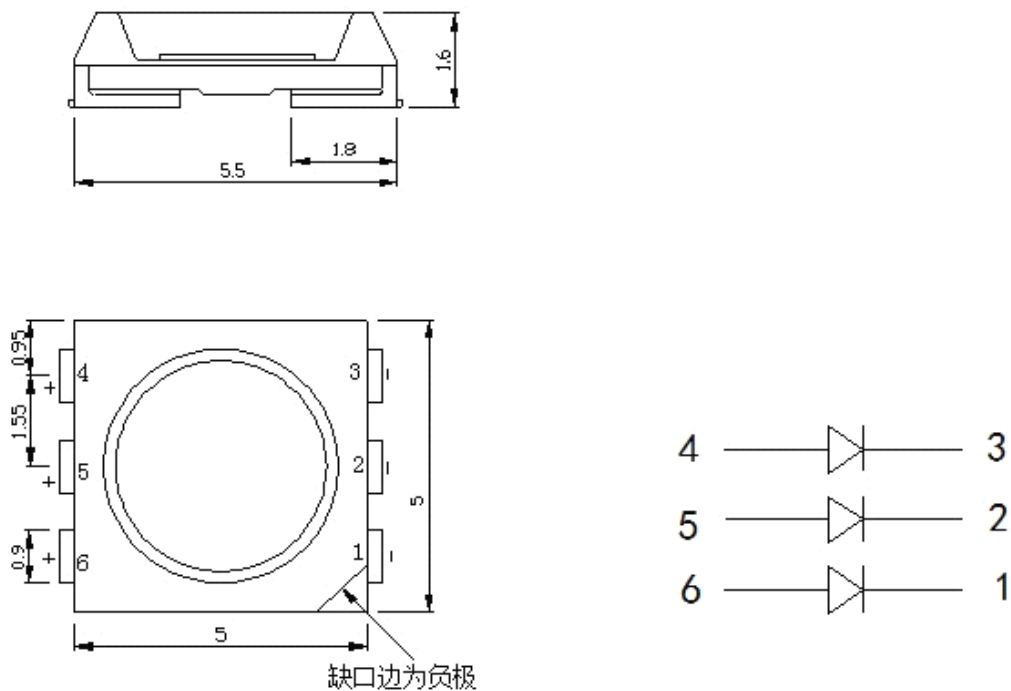

### Notes:

- (1).All dimensions are in millimeters.  
(单位: 毫米)
- (2).Tolerance is  $\pm 0.10$  unless otherwise noted.  
(尺寸公差:  $\pm 0.10$ ,另有标注除外.)
- (3).Specifications are subject to change without notice.  
(规格若有变动,恕不另行通知.)

**3、CENTRAL INFORMATION (主要资料)**

| Part No.<br>(产品型号) | Chip Material<br>(晶片材质) | Emitting Color<br>(发光颜色) | Lens Type<br>(胶体颜色) | Iv(mcd)@20mA<br>(发光强度) |               |               | Viewing Angle<br>(发光角度) |
|--------------------|-------------------------|--------------------------|---------------------|------------------------|---------------|---------------|-------------------------|
|                    |                         |                          |                     | Min.<br>(最小值)          | Typ.<br>(规格值) | Max.<br>(最大值) | 2 θ 1/2<br>(角度)         |
| LTST-E500TGKT      | GaN                     | Green<br>(绿色)            | Limpidity (透<br>明)  | 2500                   | 2750          | 3200          | 125°                    |

Note:

- (1).  $\theta$  1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. ( $\theta$  1/2 是指当亮度减到一半时与发光特性曲线相交所对应的角度值.)

**4、Electrical / Optical Characteristics at T<sub>A</sub>=25° C (25° C 环境下之电性/光学特性)**

| Parameter(参数)                 | Symbol<br>(符号)   | Min<br>(最小值) | Typ.<br>(规格值) | Max.<br>(最大值) | Units<br>(单位) | Test Conditions<br>(测试条件) |
|-------------------------------|------------------|--------------|---------------|---------------|---------------|---------------------------|
| Forward Voltage(正向电压)         | V <sub>F</sub>   | 2.8          | 3.1           | 3.6           | V             | I <sub>F</sub> =20mA      |
| Chromaticity wavelength (波长)  | Wld              | 517.5        | 520           | 525           | -             | I <sub>F</sub> =20mA      |
| Spectral Line Half-width (带宽) | $\Delta \lambda$ | -            | 29            | -             | nm            | I <sub>F</sub> =20mA      |
| Reverse Current (反向电流)        | I <sub>R</sub>   | -            | -             | 5             | uA            | V <sub>R</sub> =5V        |

**5、Absolute Maximum Ratings at T<sub>A</sub>=25° C (在 25° C 环境下之最大绝对额定值)**

| Parameter(参数)                    | Symbol(符号)            | Maximum Rating(最大值)  | Units(单位) |
|----------------------------------|-----------------------|----------------------|-----------|
| Power dissipation(功率消耗)          | Pd                    | 90                   | mW        |
| Forward Current(正向电流)            | I <sub>F</sub>        | 20                   | mA        |
| Peak Forward Current (1)(正向电流峰值) | I <sub>F</sub> (Peak) | 130                  | mA        |
| Reverse Voltage(反向电压)            | V <sub>R</sub>        | 5                    | V         |
| Operating Temperature(操作温度)      | Topr                  | -40° C To +80° C     |           |
| Storage Temperature(贮藏温度)        | Tstg                  | -40° C To +80° C     |           |
| Lead Solder Temperature(2)(焊接温度) | Tsol                  | 240° C for 3 seconds |           |

Note:


- (1). 1/10 Duty Cycle, 0.1ms Pulse Width.

(1/10 周期, 0.1ms 脉宽)


- (2). The production accord with the demand of ROHS.

(此产品符合 ROHS 要求.)


## 6、Graphs

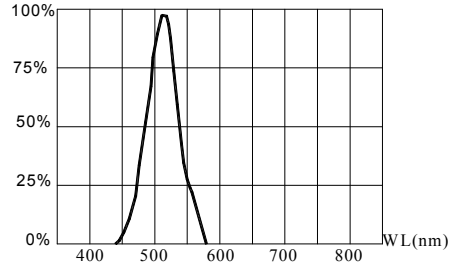


RELATIVE INTENSITY Vs. WAVELENGTH  
相对亮度与波长曲线图

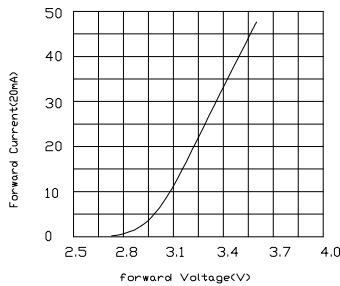


FORWARD CURRENT Vs FORWARD VOLTAGE  
正向电流与正向电压关系曲线图

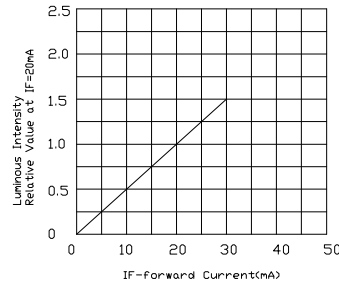

LUMINOUS INTENSITY Vs FORWARD CURRENT  
亮度与正向电流关系曲线图

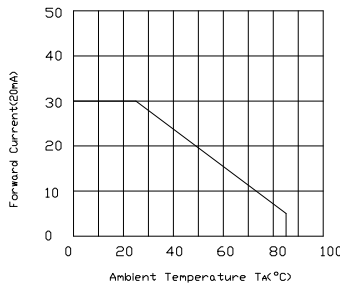


FORWARD CURRENT DERATING CURVE  
正向电流递减曲线图

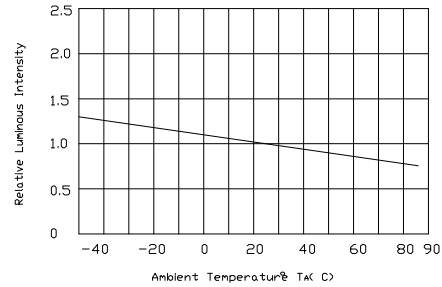

LUMINOUS INTENSITY Vs AMBIENT TEMPERATURE  
亮度与环境温度关系曲线图

### Diagram characteristics of radiation

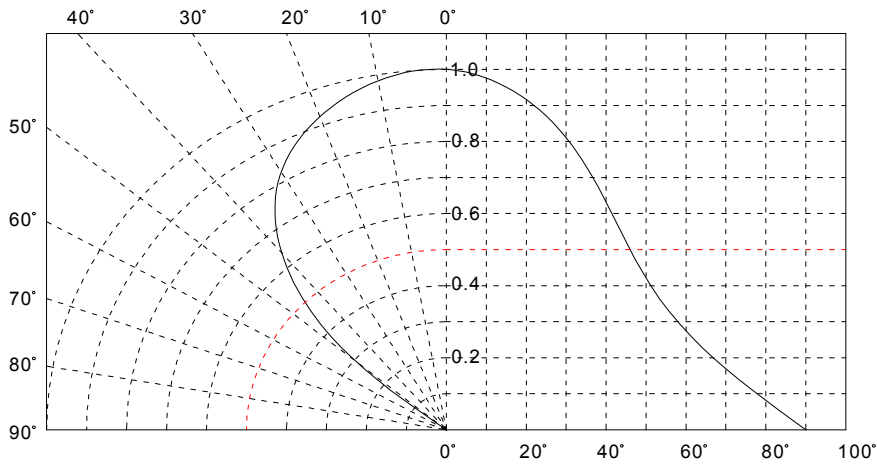


## 7、 Intensity、 Color And Forward Voltage Bin Limits(亮度、 颜色及正向电压等级)

### (1) Intensity Bin Limits ( $I_F=20mA$ )

| SELECTION CODE FOR<br>SUPER BRIGHT LEDES |  |      |
|--|--|------|
| Group                                    | Light intensity in mcd(20mA)<br>Super Bright white |      |
|  | Min.   | Max. |
| T2                                       | 1900   | 2500 |
| U1                                       | 2500   | 3200 |

Tolerance for each Bin limit is  $\pm 15\%$ .

### (2) CIE Specifications (Tolerance is $\pm 0.01@I_F=20mA$ ) 色品图

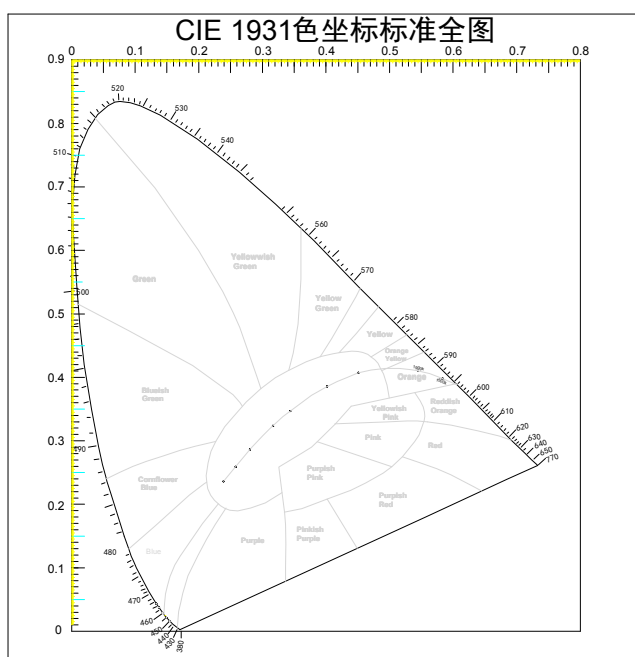

### (3) Forward Voltage Bin limits( $I_F=20mA$ )

|               |         |         |         |         |
|---------------|---------|---------|---------|---------|
| Grade<br>(等级) | V7      | V8      | V9      | V10     |
| Range<br>(范围) | 2.8-3.0 | 3.0-3.2 | 3.2-3.4 | 3.4-3.6 |

Tolerance for each Bin limit is  $\pm 0.1v$ .

## 8、Reliability Test Items and Conditions 可靠性测试项目及测试条件

| No. | Test Item<br>测试项目  | Test Conditions<br>测试条件                      | Note<br>频次 | Number of Damaged<br>允许破坏数 |
|-----|--|--|------------|----------------------------|
| 01  | Resistance to Soldering Heat(Reflow Soldering)<br>回流焊可承受条件测试 | Tsld=260℃,10sec                              | 2 times    | 0/22                       |
| 02  | Temperature Cycle<br>温度循环测试                                  | -35℃ 30min<br>↑↓5min<br>85℃ 30min            | 100 cycle  | 0/100                      |
| 03  | Thermal Shock<br>冷热冲击测试                                      | -35℃ 15min<br>↑↓<br>85℃ 15min                | 100 cycle  | 0/100                      |
| 04  | High Temperature Storage<br>高温贮藏测试                           | T <sub>a</sub> =80℃                          | 1000 hrs   | 0/100                      |
| 05  | Temperature Humidity Storage<br>恒温恒湿贮藏测试                     | T <sub>a</sub> =85℃<br>RH=90%                | 1000 hrs   | 0/100                      |
| 06  | Low Temperature Storage<br>低温贮藏测试                            | T <sub>a</sub> =-35℃                         | 1000 hrs   | 0/100                      |
| 07  | Power On/off Cycle Test<br>IF=20mA<br>亮暗测试                   | On 2 hours<br>↑↓<br>Off 10min                | 100 cycle  | 0/100                      |
| 08  | Life Test<br>常温寿命测试  | T <sub>a</sub> =25℃<br>I <sub>F</sub> =20mA  | 1000 hrs   | 0/100                      |
| 09  | High Humidity Heat Life Test<br>恒温恒湿寿命测试                     | 60℃ RH=90%<br>I <sub>F</sub> =20mA           | 500 hrs    | 0/100                      |
| 10  | Low Temperature Life Test<br>低温寿命测试                          | T <sub>a</sub> =-35℃<br>I <sub>F</sub> =20mA | 1000 hrs   | 0/100                      |
| 11  | Drop<br>跌落测试   | 75cm   | 3 times    | 0/10                       |

## 9、Criteria for Judging the Damage 破坏判定标准

| Item                       | Symbol | Test Conditions | Criteria for Judgement |             |
|----------------------------|--------|-----------------|------------------------|-------------|
|                            |        |                 | Min.                   | Max.        |
| Forward Voltage 正向电压       | VF     | IF=20mA         | —                      | U.S.L*)×1.1 |
| Reverse Current 反向电流       | IR     | VR=5V           | —                      | U.S.L*)×2.0 |
| Luminous Intensity<br>发光强度 | IV     | IF=20mA.        | L.S.L**)×0.7           | —           |