

Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK


Typical Applications

- Microwave Radios & VSAT
- Fiber Optic Infrastructure
- Military Communications & Radar

Features

- Output Power: +15 dBm
- Wide Input Power Range: 0 to +10 dBm
- 100 kHz SSB Phase Noise: -140 dBc/Hz
- +5V @ 75 mA Supply
- 16 mm² Leadless QFN SMT Package

Functional Diagram

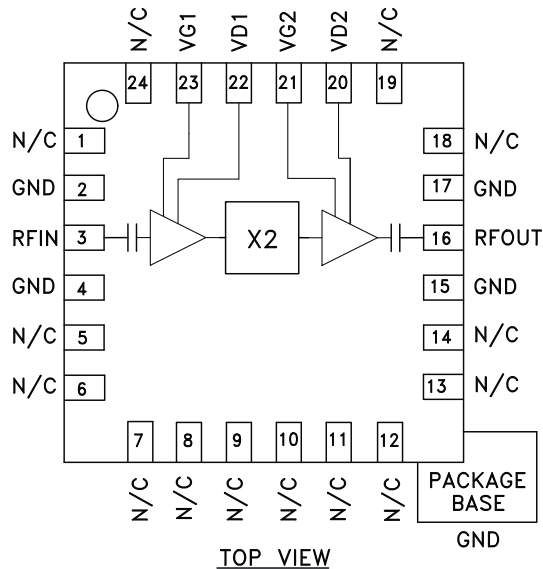

General Description

The HMC368LP4 & HMC368LP4E are miniature amp-doubler-amps utilizing GaAs PHEMT technology in 4 x 4 mm leadless surface mount packages. When driven by a +2 dBm signal, the multiplier provides +15 dBm typical output power from 9 to 16 GHz. The Fo and the 3Fo isolations are 18 dB typical. The low additive SSB phase noise of -140 dBc/Hz at 100 kHz offset helps the user maintain good system noise performance. The HMC368LP4(E) is ideal for use in LO multiplier chains allowing reduced parts count vs. traditional approaches.

Electrical Specifications, $T_A = +25^\circ C$, $V_{d1} = V_{d2} = +5.0 V_{dc}$, +2 dBm Drive Level


| Parameter | Min. | Typ. | Max. | Units |
|-------------------------------------------------|------|------------|------|--------|
| Frequency Range, Input | | 4.5 - 8.0 | | GHz |
| Frequency Range, Output | | 9.0 - 16.0 | | GHz |
| Output Power | 12 | 15 | | dBm |
| Fo Isolation (with respect to output level) | | 18 | | dB |
| 3Fo Isolation (with respect to output level) | | 18 | | dB |
| Input Return Loss | | 10 | | dB |
| Output Return Loss | | 10 | | dB |
| SSB Phase Noise (Fout = 13 GHz, 100 kHz Offset) | | -140 | | dBc/Hz |
| Supply Current (Idd)* | | 75 | | mA |

*Adjust Vg1, Vg2 between -2V to 0V to achieve Idd = 75 mA typical




**SMT GaAs PHEMT MMIC
AMP-DOUBLER-AMP, 9 - 16 GHz OUTPUT**


Output Power vs. Temperature @ +2 dBm Drive Level

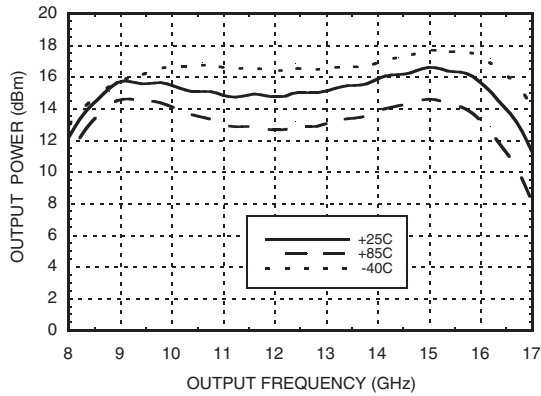


Output Power vs. Drive Level

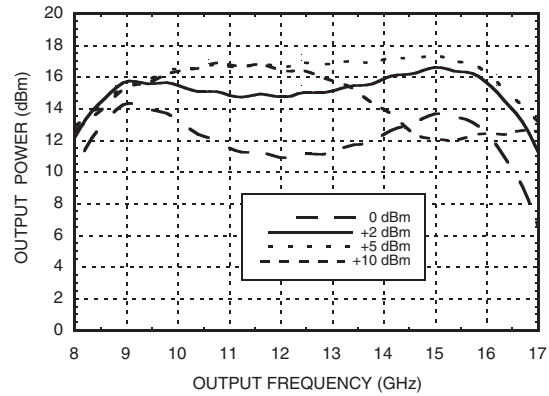


Output Power vs. Supply Voltage @ +2 dBm Drive Level

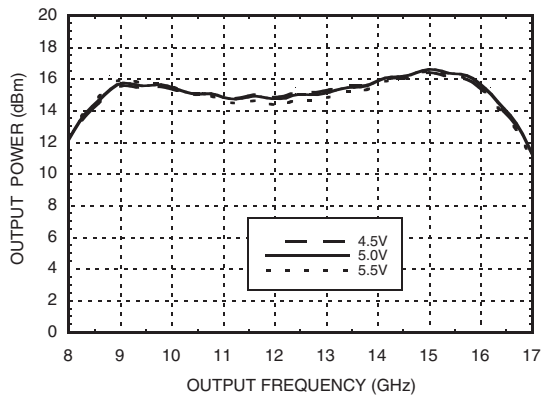


Isolation @ +2 dBm Drive Level

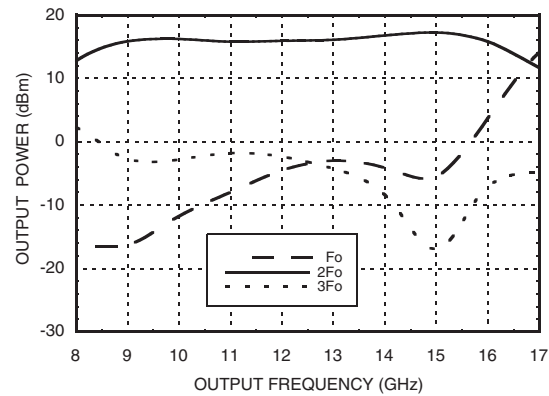

Input Return Loss vs. Temperature

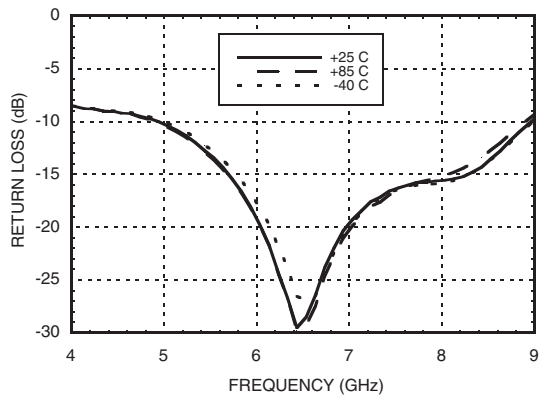


Output Return Loss vs. Temperature

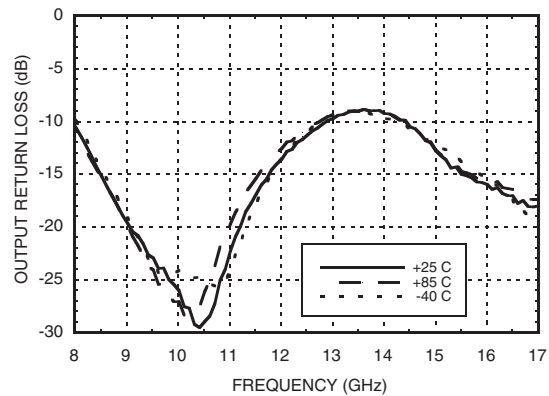




SMT GaAs PHEMT MMIC AMP-DOUBLER-AMP, 9 - 16 GHz OUTPUT


**Output Spectrum @ $f_{in} = 6.5$ GHz,
 $P_{in} = +2$ dBm**

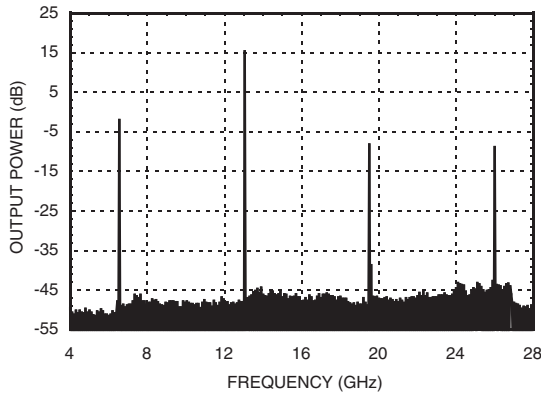

**Output Power vs. Input Power
@ Three Frequencies**

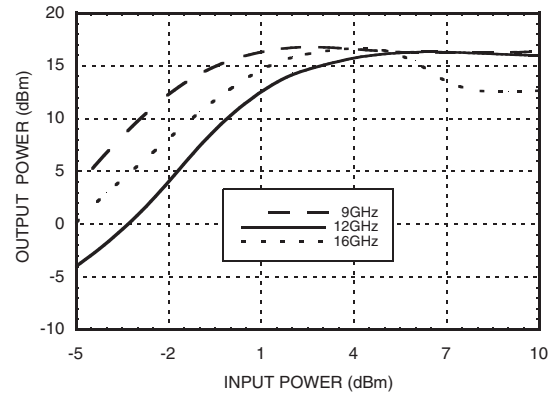

**SSB Phase Noise
Performance, $f_{out} = 13$ GHz,
Input Power = +2 dBm**

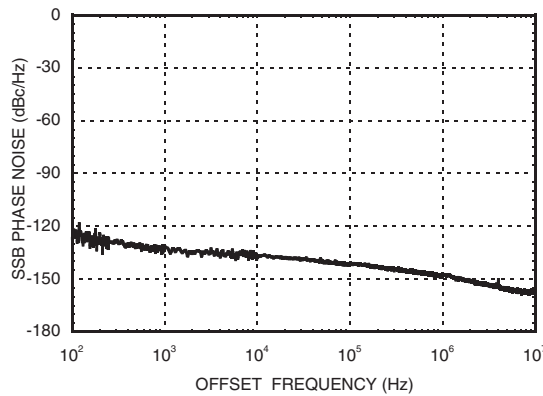

Absolute Maximum Ratings

| | |
|-----------------------------------------------------------------|----------------|
| RF Input (Vdd = +5V) | +20 dBm |
| Supply Voltage, Vd1, Vd2 | +6.0V |
| Gate Bias Voltage (Vg1, Vg2) | -4 to 0 Vdc |
| Channel Temperature | 150 °C |
| Continuous Pdiss (T = 85 °C) (derate 12.5 mW/°C above 85 °C) | 812 mW |
| Thermal Resistance (junction to ground paddle) | 80 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |

Typical Supply Current vs. Vdd


| Vdd (V) | Idd (mA) |
|---------|----------|
| 4.5 | 73 |
| 5.0 | 75 |
| 5.5 | 77 |

Note: Amp-Doubler-Amp will operate over full voltage range shown above.



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

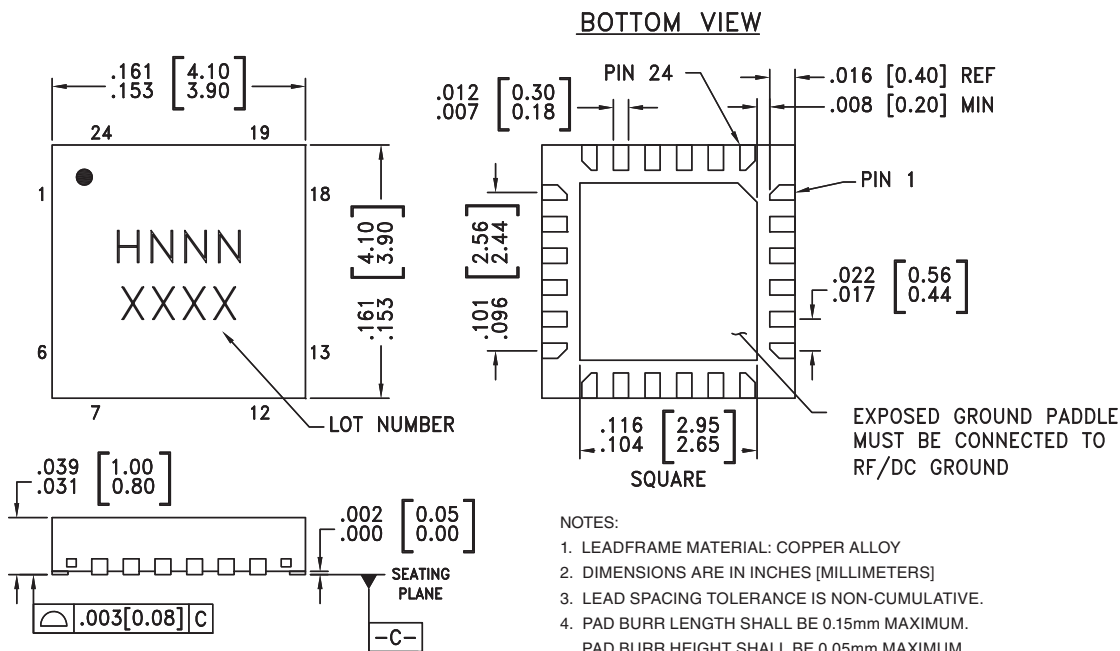

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC368LP4 | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | H368 XXXX |
| HMC368LP4E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | H368 XXXX |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C


[3] 4-Digit lot number XXXX



Pin Description

| Pin Number | Function | Description | Interface Schematic |
|------------------------|----------|--------------------------------------------------------------------------------------------|---------------------|
| 1, 5-14, 18, 19, 24 | N/C | No Connection. These pins may be connected to RF ground. Performance will not be affected. | |
| 3 | RFIN | Multiplier Input. AC Coupled. No external DC blocks required. | RFIN ○ — — |
| 2, 4, 15, 17 | GND | All ground leads and ground paddle must be soldered to PCB RF/DC ground. | ○ GND ⏏ |
| 16 | RFOUT | Multiplied Output. AC coupled. No external DC blocks necessary. | — — ○ RFOUT |
| 20, 22 | Vd2, Vd1 | Drain supply voltage 5V ± 0.5V. | ○ Vd1, Vd2 ⏏ |
| 21, 23 | Vg2, Vg1 | Gate supply voltages. Adjust between -2 Vdc to 0 Vdc to achieve 75 mA drain current. | ○ Vg1, Vg2 ⏏ |

Evaluation PCB

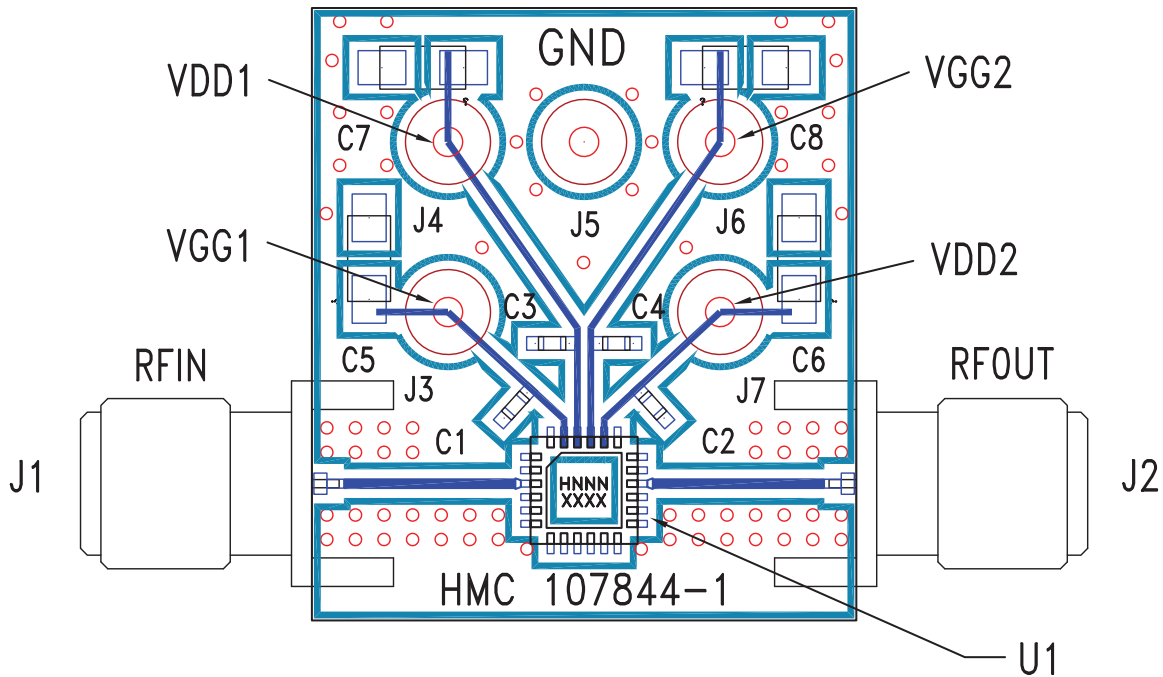

List of Materials for Evaluation PCB 107846 [1]

| Item | Description |
|---------|-----------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 - J7 | DC Pin |
| C1 - C4 | 100 pF capacitor, 0402 Pkg. |
| C5 - C8 | 2.2 μF capacitor, case size A |
| U1 | HMC368LP4 / HMC368LP4E Amp-x2-Amp |
| PCB [2] | 107844 PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. The evaluation circuit board shown is available from Hittite upon request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC368LP4E](#) [107846-HMC368LP4](#) [HMC368LP4ETR](#) [HMC368LP4](#) [HMC368LP4TR](#)