



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



# FGBS3040E1\_F085

## Integrated Smart Ignition Coil Driver

### Features

- 400V 300mJ N Channel Ignition IGBT
- Control Input buffering
- Input spike filter of typical 13us
- Operation from Ignition or Battery line
- Ground shift tolerance +/- 1.5V
- Programmable maximum dwell time
- Current programmable bidirectional Input/Diagnostic pin
- Collector Current limit typical 16.5A
- Soft Shutdown of Collector Current after Max Dwell

### Applications

- Coil on Plug Ignition systems
- General ignition systems

### Related Resources

<http://www.fairchildsemi.com/applications/automotive/ignition/>

### Description

The FGBS3040E1\_F085 is designed to directly drive an ignition coil and control the current and spark event of the coil. The coil current is controlled via the input/diagnostic pin. When the input is driven high, the IGBT is enabled to start charging the coil. The FGBS3040E1\_F085 will sink a current (IIN1) into the input to denote this condition. When the collector current increases to Icthr the input current into the FGBS3040E1\_F085 is reduced to IIN2 indicating the collector current has reached this level. An input filter suppresses input signals of less than 13  $\mu$ sec in duration. A Max Dwell timer is included in the FGBS3040E1\_F085 which will turn off the IGBT if the input stays active for longer than the programmed time. This time interval can be modified through an external capacitor. When the Max Dwell timer is exceeded, the FGBS3040E1\_F085 will enter a Soft-Shut-Down mode (SSD) slowly dropping the collector current thereby discharging the coil such as to inhibit a spark event. Once the soft shutdown operation has started, any transitions on the input signal are ignored until after completion of the soft shutdown function. The FGBS3040E1\_F085 will also limit the collector current of the IGBT to Ic(lim) during charging.

---

### Ordering Information

[Contact Your Local Sales Representative](#)

**Block Diagram**


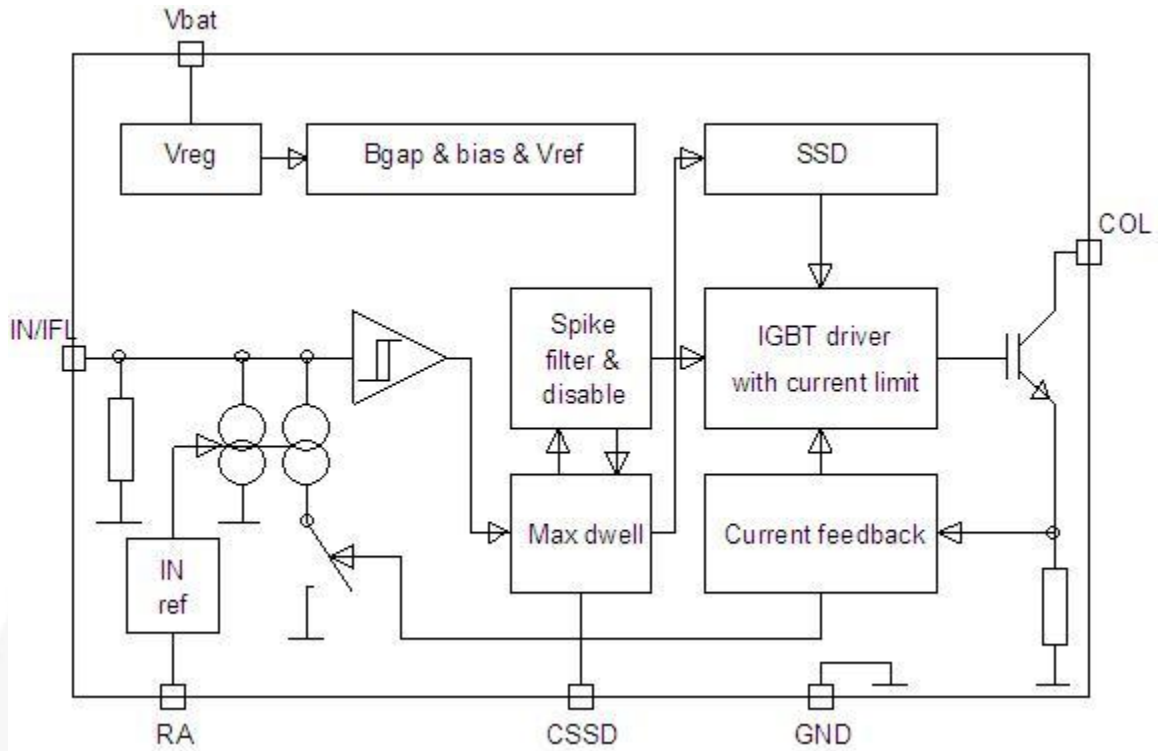


Figure 1. Block Diagram of FGBS3040E1\_F085

**Typical Application**


Figure 2. Typical Ignition Coil Driver Application

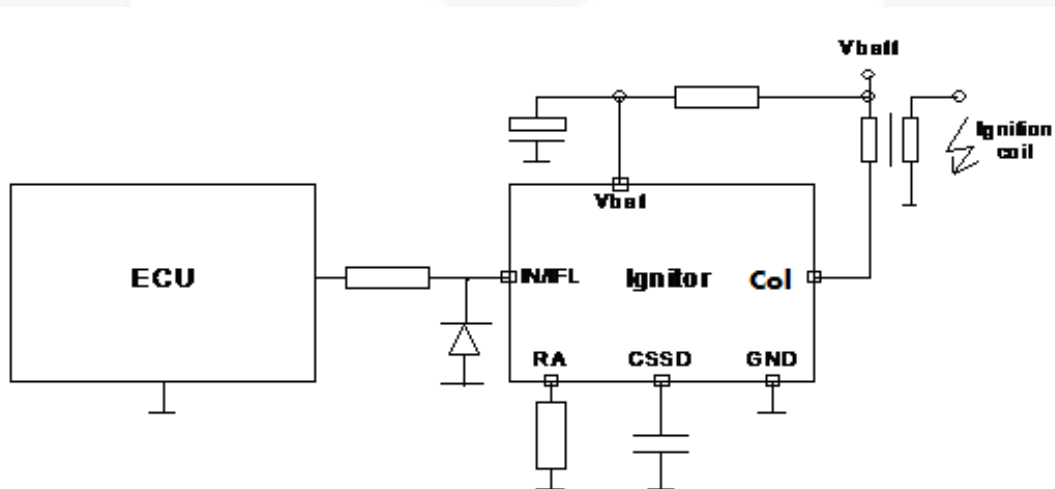

## Pin Configuration

The FGBS3040E1\_F085 is assembled in a 7 lead TO263 package

TO263-7L



Pin Assignment (Top Through View)

|          |        |  |
|----------|--------|--|
| Pin1     | GND    | Emitter and control IC ground  |
| Pin2     | Vbat   | Supply voltage   |
| Pin3     | IN/IFL | Input and diagnostic (bidirectional)   |
| Pin4/Tab | COL    | IGBT collector output  |
| Pin5     | NC     | NC   |
| Pin6     | CSSD   | Maximum dwell time and Soft-Shut-Down current output (to external capacitor) |
| Pin7     | RA     | Input reference current output (to external resistor)                        |

## Absolute Maximum Ratings<sup>1</sup>

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Parameter  | Symbol   | Values                  | Unit     |
|--|--|-------------------------|----------|
| Voltage at V <sub>bat</sub> pin (excl. EMC transients)   | V <sub>bat</sub>                                       | -0.3... 28              | V        |
| Voltage at IN/IFL pin  | V <sub>IN1</sub>                                       | - 1... 16               | V        |
| Voltage at A & C <sub>SSD</sub> pins   | V <sub>IN2</sub>                                       | - 0.3... 6              | V        |
| Collector Emitter Voltage (V <sub>IN</sub> = 0V) I <sub>C</sub> =10mA  | V <sub>C-GND(CL)</sub>                                 | 450                     | V        |
| Operating Temperature Range  | T <sub>J</sub>   | -40... +175             | °C       |
| Storage Temperature Range  | T <sub>STG</sub>                                       | -40... +175             | °C       |
| Output Current   | I <sub>C(lim)</sub>                                    | I <sub>C(lim) max</sub> | A        |
| Self Clamped Inductive Switched Energy @T <sub>j</sub> = 25°C  | E <sub>AS</sub>  | 300                     | mJ       |
| Self Clamped Inductive Switched Energy @T <sub>j</sub> = 150°C   | E <sub>AS</sub>  | 170                     | mJ       |
| Maximum power dissipation (continuous) from TC = 25°C  | P <sub>max</sub>                                       | 150                     | W        |
| Thermal Resistance junction–case (typical)   | R <sub>θJC</sub>                                       | 1                       | °C /W    |
| Electrostatic Discharge Voltage (Human Body Model)<br>according to MIL STD 883D, method 3015.7 and EOS/ESD<br>assn. standard S5.1 - 1993 | V <sub>ESD</sub> (pin to pin)<br>V <sub>ESD</sub> (CE) | 2<br>4                  | kV<br>kV |

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol                        | Parameter   | Conditions  | Min. | Typ. | Max. | Unit       |
|-------------------------------|---|---|------|------|------|------------|
| $V_{INL}$                     | Input low voltage                                       | $V_{bat} = 5$ to $28$ V;<br>$T_J = -40$ °C to $+175$ °C (unless otherwise specified)                    | -0.3 |      | 2.05 | V          |
| $V_{INH}$                     | Input high voltage                                      | $V_{bat} = 5$ to $28$ V;<br>$T_J = -40$ °C to $+175$ °C (unless otherwise specified)                    | 2.85 |      |      | V          |
| $V_{INHys}$                   | Input voltage hysteresis                                | $V_{bat} = 5$ to $28$ V;<br>$T_J = -40$ °C to $+175$ °C (unless otherwise specified)                    | 0.25 |      |      | V          |
| $I_{IN1}$                     | Input current ( $I_C < I_{C\_THR}$ )                    | See fig 8 for typical values vs $R_a$<br>(Measured with $11.5k_{\Omega}$ , $\pm 1\%$ resistor on A pin) | 16   | 18   | 20   | mA         |
| $I_{IN2}$                     | Input current ( $I_C > I_{C\_THR}$ )                    | See fig 8 for typical values vs $R_a$<br>(Measured with $11.5k_{\Omega}$ , $\pm 1\%$ resistor on A pin) | 6    | 7.1  | 10   | mA         |
| $I_{IN1}$                     | Input current ( $I_C < I_{C\_THR}$ )                    | <b>(Note 1)</b>   |      | 4.2  |      | mA         |
| $I_{IN2}$                     | Input current ( $I_C > I_{C\_THR}$ )                    | <b>(Note 1)</b>   |      | 1.8  |      | mA         |
| $C_{OSS}$                     | Output capacitance                                      | $V_{C\_GND} = 25$ V, $V_{IN} = 0$ V, $f = 1$ MHz  |      | 70   |      | pF         |
| $I_{C\_THR}$                  | Collector current feedback (IFL) threshold 25 C to 175C | (Measured with $11.5k_{\Omega}$ , $\pm 1\%$ resistor on A pin)  | 4.3  | 5.3  | 6.8  | A          |
| $I_{C\_THR}$<br><i>Note 3</i> | Collector current feedback (IFL) threshold -40C         | (Measured with $11.5k_{\Omega}$ , $\pm 1\%$ resistor on A pin)  | 4.3  |      | 7.3  | A          |
| $R_A$                         | Resistor for input reference current                    |   | 5.2  |      | 200  | k $\Omega$ |
| $CSSD_{MIN}$                  | Minimum dwell time capacitor                            |   |      | 2.2  |      | nF         |
| $T_{DMAX}$                    | Maximum dwell time                                      | ( $CSSD_{EXT} = 10$ nF)   | 19   | 23   | 28   | ms         |
| $I_{SLEW}$                    | Soft-Shut-Down slew rate                                | ( $I_C: 90\% - 20\% I_L$ )  | 0.7  | 1.5  | 2.5  | A/ms       |
| $I_{CSSD1}$                   | CSSD Pin current for $T_{DMAX}$                         |   | 1.0  | 1.25 | 1.5  | $\mu$ A    |

## Electrical Characteristics

| Symbol            | Parameter   | Conditions  | Min. | Typ. | Max. | Unit          |
|-------------------|---|---|------|------|------|---------------|
| $V_{bat1}$        | Operating voltage   | Coil switching  | 4    |      | 28   | V             |
| $V_{bat2}$        | Operating voltage   | All functions   | 5    |      | 28   | V             |
| $I_{bat}$         | Supply current  | ( $T_J=175^\circ\text{C}$ , $V_{bat} = 28\text{V}$ , RA open, IN/IFL = 5V)          |      |      | 5    | mA            |
| $V_{C-GND(CL)}$   | Collector emitter clamping voltage  | ( $I_C = 10\text{ mA}$ )  | 390  |      | 450  | V             |
| $I_{C(leak)}$     | Collector leakage current   | ( $T_J=175^\circ\text{C}$ , $V_{C-GND}=300\text{ V}$ )                              |      |      | 30   | $\mu\text{A}$ |
| $V_{C-GND(SA T)}$ | Collector emitter saturation voltage ( $I_C=10\text{A}$ , $T_J=175^\circ\text{C}$ ) | Collector emitter saturation voltage ( $I_C=10\text{A}$ , $T_J=175^\circ\text{C}$ ) |      |      | 1.8  | V             |
| $I_{C(lim)}$      | Current Limit   | <b>(Note 2)</b>   | 14   |      | 19   | A             |
| $T_{fall}$        | Current fall time   | Current fall time   |      |      | 15   | $\mu\text{s}$ |
| $T_{spike}$       | Input spike filter delay on rising and falling edge of IN/IFL                       | Input spike filter delay on rising and falling edge of IN/IFL                       |      | 13   |      | $\mu\text{s}$ |
| $T_{D1}$          | Turn on delay time (Time from VIN/IFL=4.0 V to $V_{C-gnd}=V_{bat}/2$ )              | Turn on delay time (Time from VIN/IFL=4.0 V to $V_{C-gnd}=V_{bat}/2$ )              | 10   | 13   | 26   | $\mu\text{s}$ |
| $T_{D2}$          | Turn off delay time (Time from VIN/IFL=0.5 V to $V_{C-gnd}=V_{bat}/2$ )             | Turn off delay time (Time from VIN/IFL=0.5 V to $V_{C-gnd}=V_{bat}/2$ )             | 10   | 17   | 28   | $\mu\text{s}$ |

### Notes:

1. Measured with open or shorted RA pin
2. Range can be varied between typ. 8-16.5A or can be eliminated with metal mask options
3.  $I_{Cth\ max} < 7.3\text{A} - 0.0077 \cdot (T+40\text{C})$  for  $T_J$  from  $-40$  to  $25\text{C}$

## Functional Description

### Input and spike filter

When the input signal voltage reaches VINH, the coil current will be switched on through the IGBT. When the input voltage goes below VINL, the coil current through the IGBT will be turned off. If the ignitor is in SSD mode, the input signal control is disabled. After a SSD sequence input control will be re-enabled after the input has reached a valid low. Positive and negative spikes of < Tspike duration at the input line will be filtered out and will not turn on/off the IGBT.

### Bidirectional input / diagnosis pin

The pin IN/IFL has a double function. It is used as input pin to control the power stage (on/off) and as output pin that delivers diagnostic information about the collector current level (current flag).

- If the input voltage reaches VINH, the power stage is turned on. If the input voltage is below VINL, the power stage is turned off.
- The IN/IFL pin sinks constantly a current of IIN1. When the input voltage is above VINH and the collector current exceeds the IcTHR threshold, the current flag is set by switching a current sink at the bidirectional IN/IFL pin to IIN2 (see Fig.4)
- If resistor RA has a value <5.2k or >200k, IIN1 and IIN2 will be set to their default values.

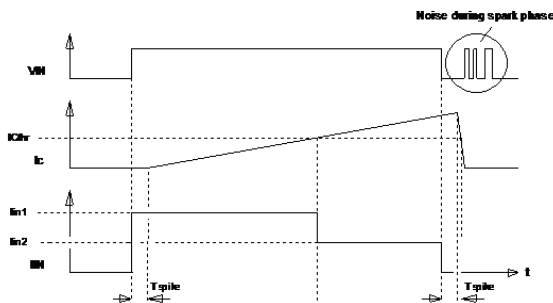


Figure 4: Bidirectional IN/IFL Diagnostic Pin

### Maximum dwell time and soft-shutdown (SSD)

When the IGBT is turned on, a delay timer, dependent on the value of the external CSSD capacitor (see Fig.6), is started. If a valid falling edge has not been received after the time TDMAX, the IGBT will be turned off slowly as shown in Fig.5. The coil current will not exceed a slow rate of typical 1.2A/ms. If a valid falling edge is received after the time TDMAX, the edge will be ignored and the soft shutdown will be completed. The IGBT cannot be subsequently turned on until a valid rising edge is detected.

If the CSSD capacitor has a value of < 2.2nF or the CSSD pin is shorted to ground, the maximum dwell time and SSD functions will be disabled.

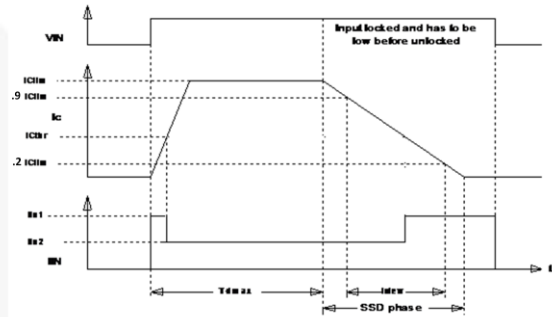


Figure 5: Dwell time and Soft-Shut-Down

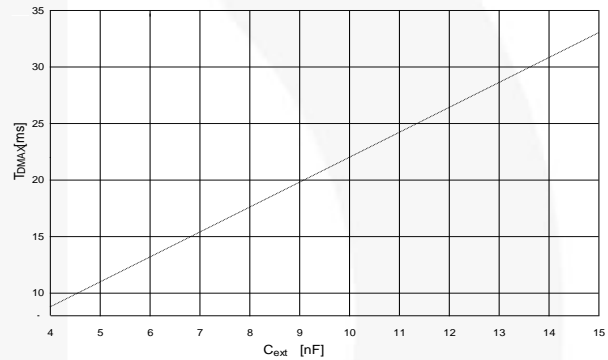


Figure 6: T<sub>DMAX</sub> as function of external CSSD capacitor

Figure 7 shows the IN1 and IN2 currents in dependency of the IRA current.






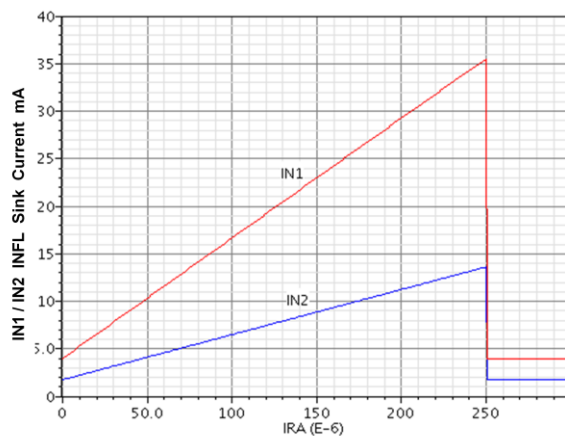


Figure 7: Typical IN1 and IN2 Currents vs Ra  
The value for RA can be determined by the formula:  
 $RA = (1.24/IRA) - 750$ .

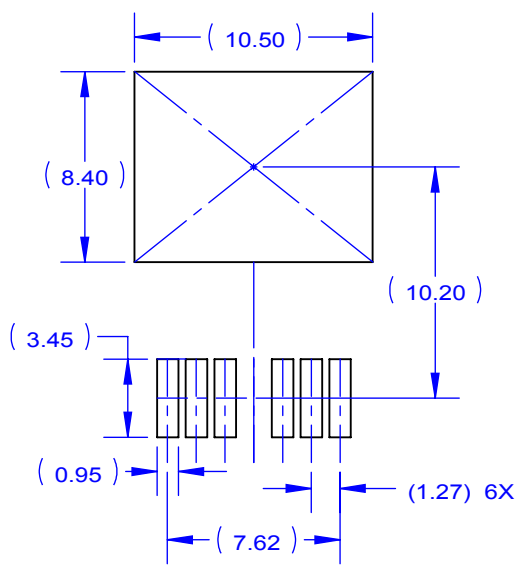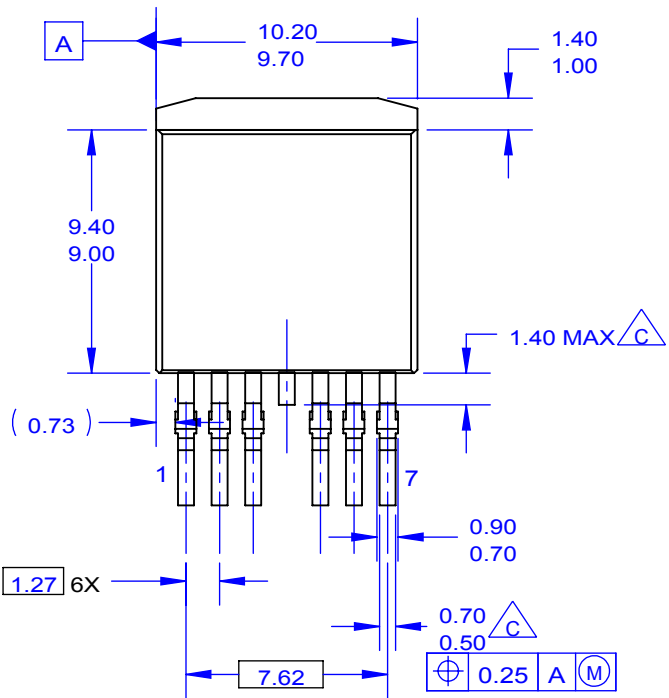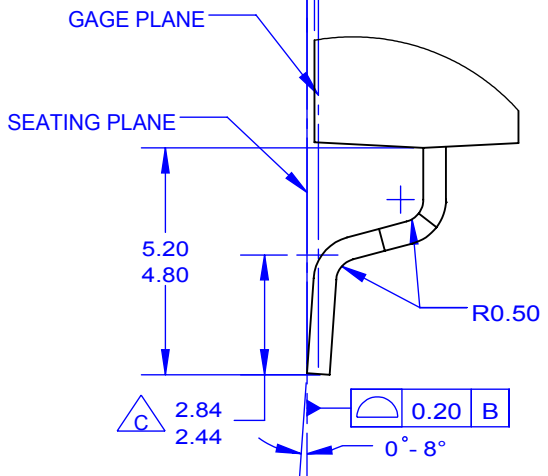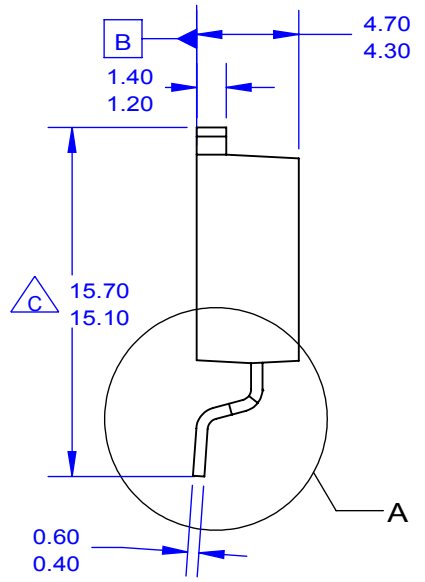

LAND PATTERN RECOMMENDATION

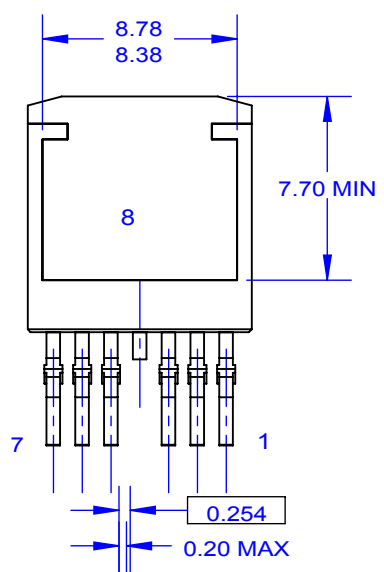

DETAIL A  
SCALE 2:1

NOTES:

- A. PACKAGE CONFORMS TO JEDEC TO-263 VARIATION CB EXCEPT WHERE NOTED.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. OUT OF JEDEC STANDARD VALUE.
- D. DIMENSION AND TOLERANCE AS PER ASME Y14.5-1994.
- E. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- F. LAND PATTERN RECOMMENDATION PER IPC TO127P1524X465-8N.
- G. DRAWING FILE NAME: TO263A07REV5.





**TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- AccuPower™
- AttitudeEngine™
- Awinda®
- AX-CAP®\*
- BitSiC™
- Build it Now™
- CorePLUS™
- CorePOWER™
- CROSSVOL™
- CTL™
- Current Transfer Logic™
- DEUXPEED®
- Dual Cool™
- EcoSPARK®
- EfficientMax™
- ESBC™
- F**™
- Fairchild®
- Fairchild Semiconductor®
- FACT Quiet Series™
- FACT®
- FastvCore™
- FETBench™
- FPS™
- F-PFS™
- FRFET®
- Global Power Resource<sup>SM</sup>
- GreenBridge™
- Green FPS™
- Green FPS™ e-Series™
- Gmax™
- GTO™
- IntelliMAX™
- ISOPLANAR™
- Making Small Speakers Sound Louder and Better™
- MegaBuck™
- MICROCOUPLER™
- MicroFET™
- MicroPak™
- MicroPak2™
- MillerDrive™
- MotionMax™
- MotionGrid®
- MTi®
- MTx®
- MVN®
- mWSaver®
- OptoHiT™
- OPTOLOGIC®
- OPTOPLANAR®
- ®
- Power Supply WebDesigner™
- PowerTrench®
- PowerXS™
- Programmable Active Droop™
- QFET®
- QS™
- Quiet Series™
- RapidConfigure™
- ™
- Saving our world, 1mW/W/kW at a time™
- SignalWise™
- SmartMax™
- SMART START™
- Solutions for Your Success™
- SPM®
- STEALTH™
- SuperFET®
- SuperSOT™-3
- SuperSOT™-6
- SuperSOT™-8
- SupreMOS®
- SyncFET™
- Sync-Lock™
- SYSTEM GENERAL®
- TinyBoost®
- TinyBuck®
- TinyCalc™
- TinyLogic®
- TINYOPTO™
- TinyPower™
- TinyPWM™
- TinyWire™
- TranSiC™
- TriFault Detect™
- TRUECURRENT®\*
- μSerDes™
- SerDes™
- UHC®
- Ultra FRFET™
- UniFET™
- VCX™
- VisualMax™
- VoltagePlus™
- XS™
- Xsens™
- 仙童®

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT [HTTP://WWW.FAIRCHILDSEMI.COM](http://www.fairchildsemi.com). FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

**AUTHORIZED USE**

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

**ANTI-COUNTERFEITING POLICY**

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

**PRODUCT STATUS DEFINITIONS**

**Definition of Terms**

| Datasheet Identification | Product Status        | Definition  |
|--------------------------|-----------------------|---|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.   |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.   |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.  |

Rev. I77

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fairchild Semiconductor:](#)

[FGBS3040E1\\_F085](#)