



# TF256TH

## N-Channel JFET 20V, 140 to 450 $\mu$ A, 1.7mS, VTFP

ON Semiconductor®

<http://onsemi.com>

### Features

- High gain :  $GV=2.7\text{dB typ}$  ( $V_{CC}=2\text{V}$ ,  $R_L=2.2\text{k}\Omega$ ,  $C_{in}=5\text{pF}$ ,  $V_{IN}=10\text{mV}$ ,  $f=1\text{kHz}$ )
- Ultrasmall package facilitates miniaturization in end products
- Best suited for use in electret condenser microphone for audio equipments and telephones
- Excellent transient characteristics
- Adoption of FBET process
- Halogen free compliance

### Specifications

#### Absolute Maximum Ratings at $T_a=25^\circ\text{C}$


Parameter	Symbol	Conditions	Ratings	Unit
Gate-to-Drain Voltage	$V_{GDO}$		-20	V
Gate Current	$I_G$		10	mA
Drain Current	$I_D$		1	mA
Allowable Power Dissipation	$P_D$		100	mW
Junction Temperature	$T_j$		150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$		-55 to +150	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

### Package Dimensions

unit : mm (typ)


7031A-001

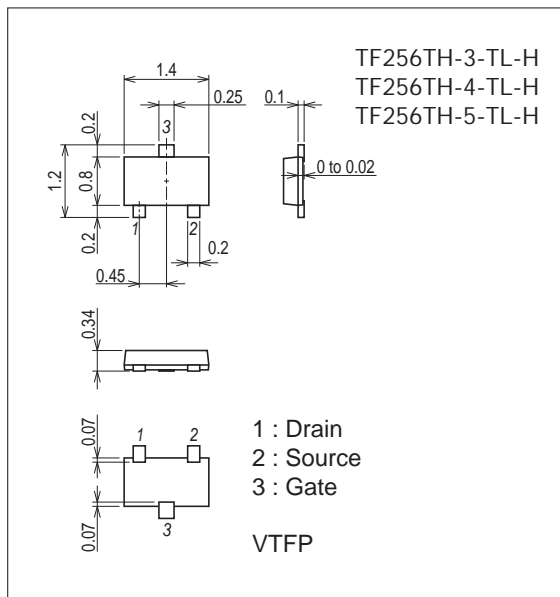


### Product & Package Information

- Package : VTFP
- JEITA, JEDEC : SC-106A
- Minimum Packing Quantity : 8,000 pcs./reel


### Packing Type: TL



### Marking



### Electrical Connection



# TF256TH

## Electrical Characteristics at Ta=25°C


Parameter	Symbol	Conditions	Ratings				Unit
			Rank	min	typ	max	
Gate-to-Drain Breakdown Voltage	V(BR)GDO	I <sub>G</sub> =-100μA		-20			V
Cutoff Voltage	V <sub>GS(off)</sub>	V <sub>DS</sub> =2V, I <sub>D</sub> =1μA		-0.1	-0.35	-1.0	V
Drain Current	I <sub>DSS</sub> *	V <sub>DS</sub> =2V, V <sub>GS</sub> =0V	3	100		180	μA
			4	140		280	
			5	240		450	
Forward Transfer Admittance	y <sub>fs</sub>	V <sub>DS</sub> =2V, V <sub>GS</sub> =0V, f=1kHz		0.75	1.7		mS
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =2V, V <sub>GS</sub> =0V, f=1MHz			3.1		pF
Reverse Transfer Capacitance	C <sub>rss</sub>				1.0		pF
[Ta=25°C, V <sub>CC</sub> =2.0V, R <sub>L</sub> =2.2kΩ, C <sub>in</sub> =5pF, See specified Test Circuit.]							
Voltage Gain	G <sub>V</sub>	V <sub>IN</sub> =10mV, f=1kHz	3		1.0		dB
			4		2.0		
			5		3.0		
Reduced Voltage Characteristic	ΔG <sub>VV</sub>	V <sub>IN</sub> =10mV, f=1kHz, V <sub>CC</sub> =2.0V → 1.5V	3		-0.5	-1.0	dB
			4		-0.6	-1.3	
			5		-0.9	-2.0	
Frequency Characteristic	ΔG <sub>Vf</sub>	f=1kHz to 110Hz				-1.0	dB
Total Harmonic Distortion	THD	V <sub>IN</sub> =30mV, f=1kHz	3		1.4		%
			4		0.9		
			5		0.35		
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =0V, A curve			-105	-100	dB

\* : The TF256TH is classified by I<sub>DSS</sub> as follows : (unit : μA)

Rank	3	4	5
I <sub>DSS</sub>	100 to 180	140 to 280	240 to 450









## Test Circuit







- Voltage gain
- Frequency Characteristic
- Distortion
- Reduced Voltage Characteristic

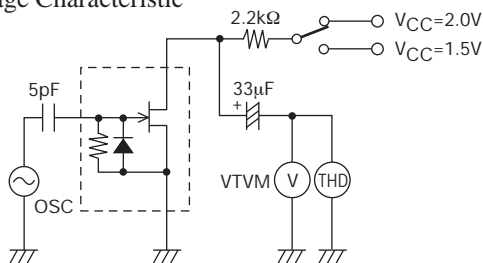

## Ordering Information

Device	Package	Shipping	memo
TF256TH-3-TL-H	VTFP	8,000pcs./reel	Pb Free and Halogen Free
TF256TH-4-TL-H	VTFP	8,000pcs./reel	
TF256TH-5-TL-H	VTFP	8,000pcs./reel	

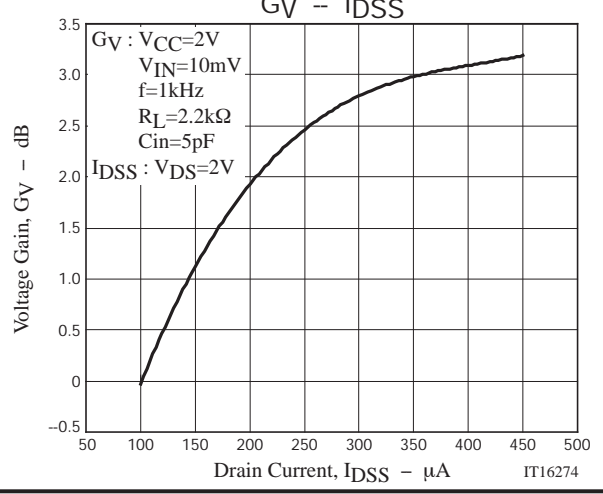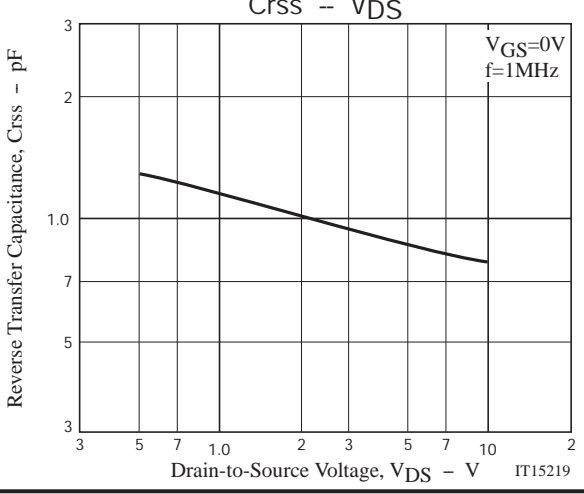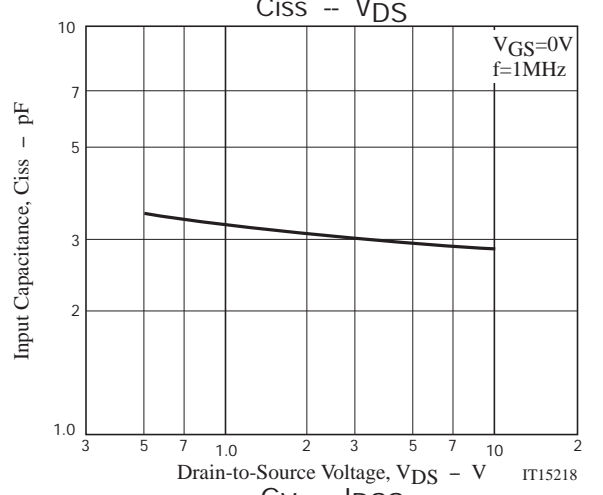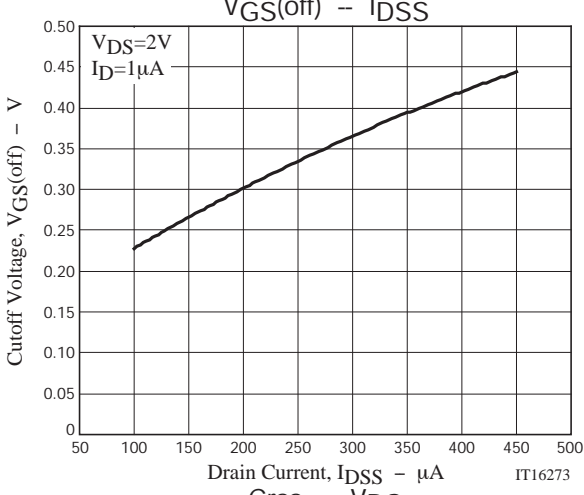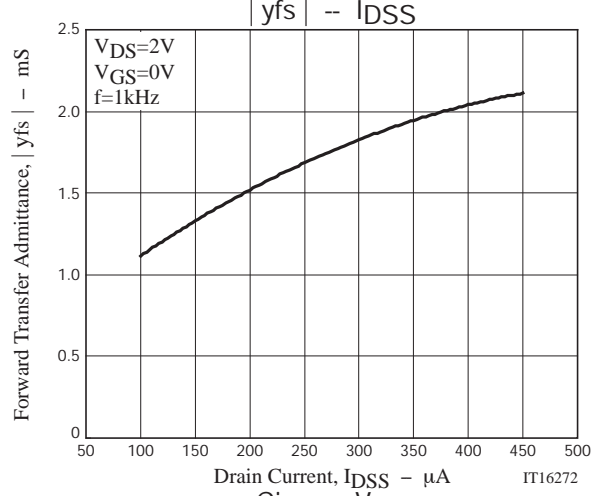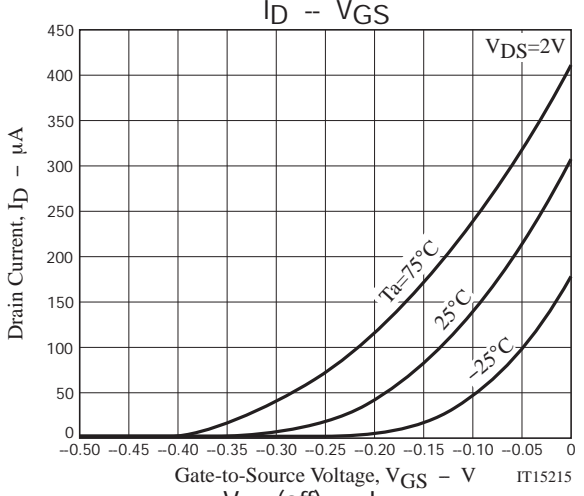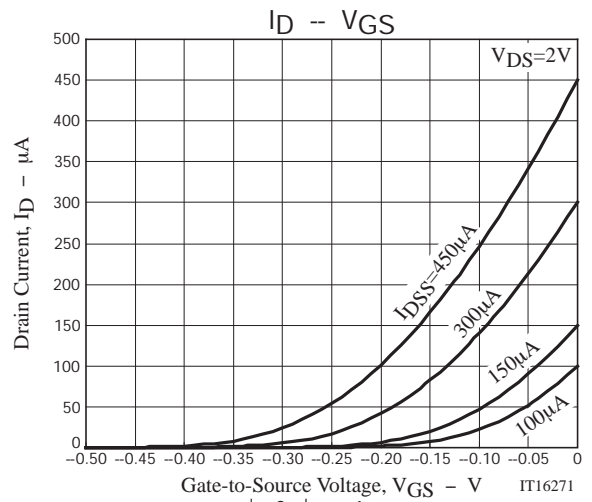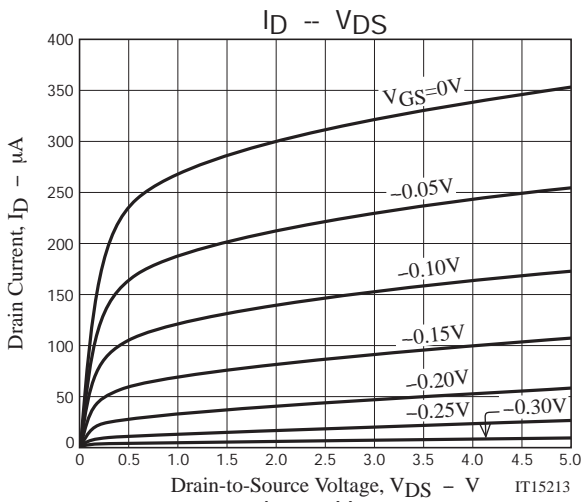

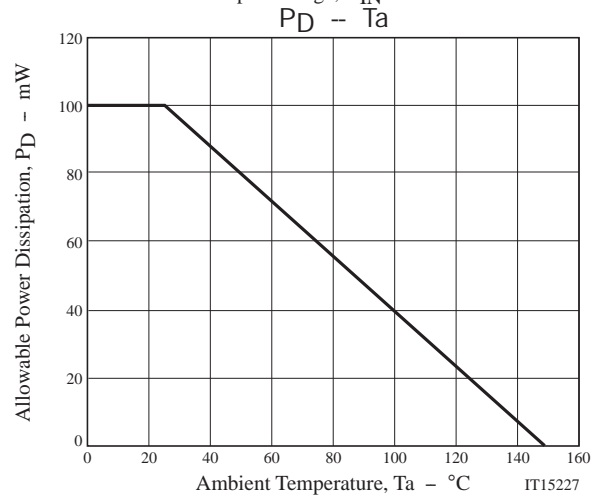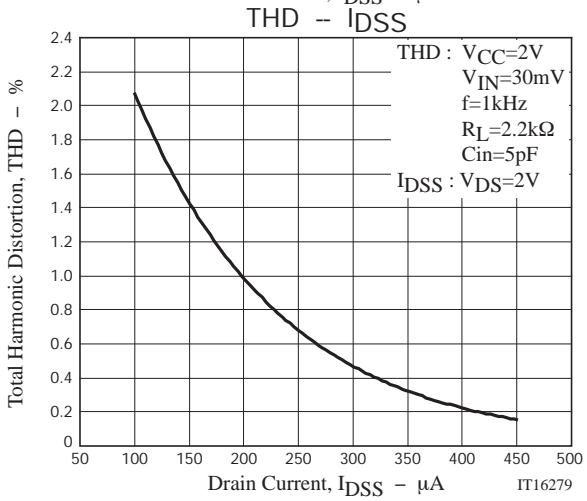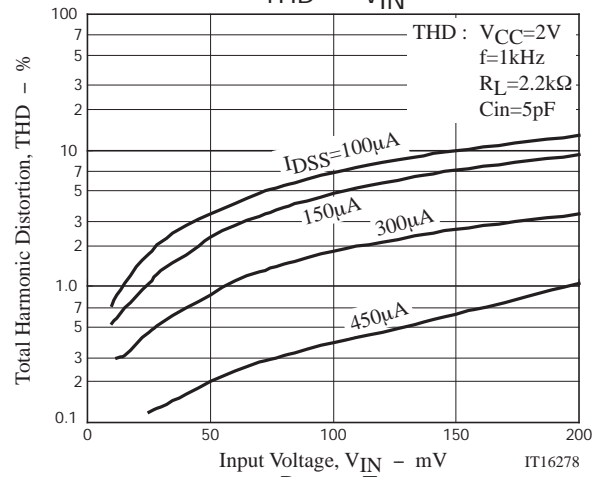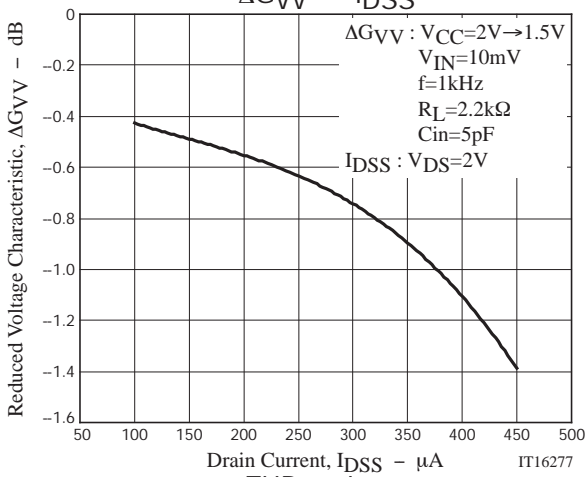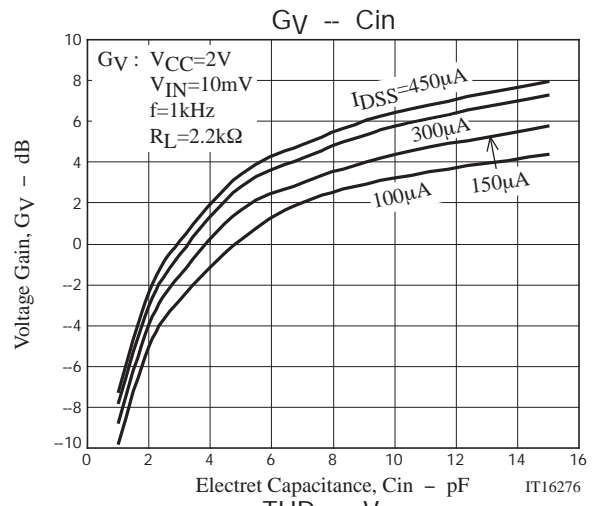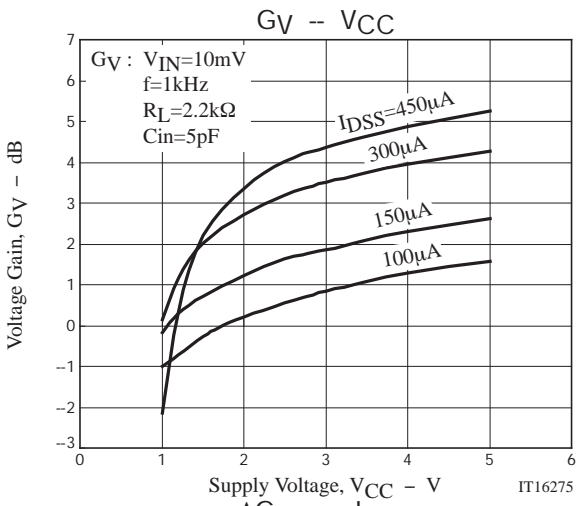

# TF256TH


## Taping Specification

TF256TH-3-TL-H, TF256TH-4-TL-H, TF256TH-5-TL-H

### 1. Packing Format

Package Name	Carrier Tape Type	Maximum Number of devices contained (pcs)			Packing format	
		Reel	Inner box	Outer box	Inner BOX (C-1)	Outer BOX (A-7)
VTFP	VSFP	8,000	40,000	240,000	5 reels contained Dimensions:mm (external) 183×72×185	6 inner boxes contained Dimensions:mm (external) 440×195×210

#### Packing method

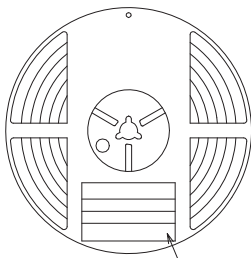


Reel label

Type No.  
LOT No.  
Quantity  
Origin

Reel label, Inner box label  
(unit :mm)

Outer box label

It is a label at the time of factory shipments.  
The form of a label may change in physical distribution process.

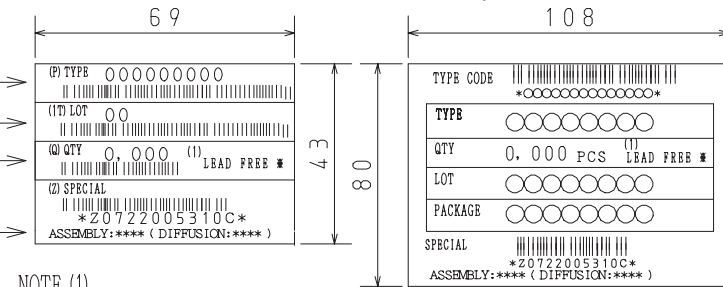


NOTE (1)

The LEAD FREE \* description shows that the surface treatment of the terminal is lead free.


Label	JEITA Phase
LEAD FREE 3	JEITA Phase 3A
LEAD FREE 4	JEITA Phase 3

### 2. Taping configuration

#### 2-1. Carrier tape size (unit:mm)

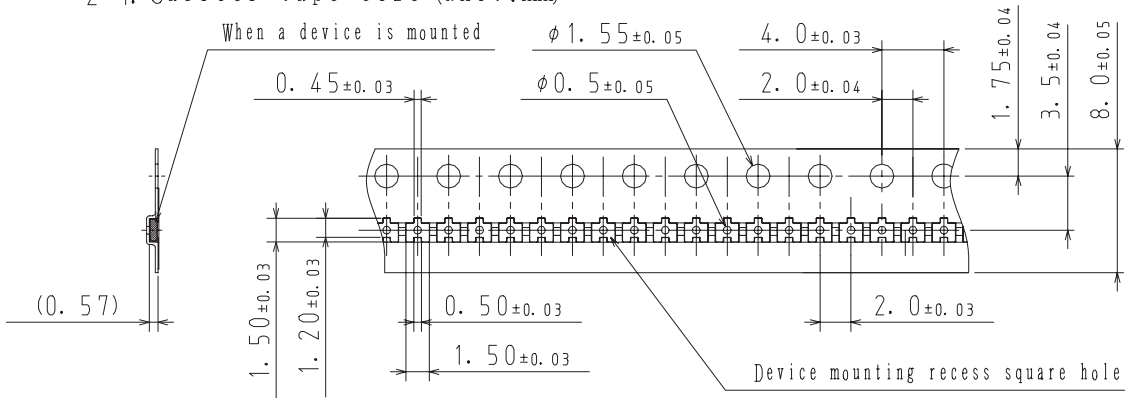

#### 2-2. Device placement direction

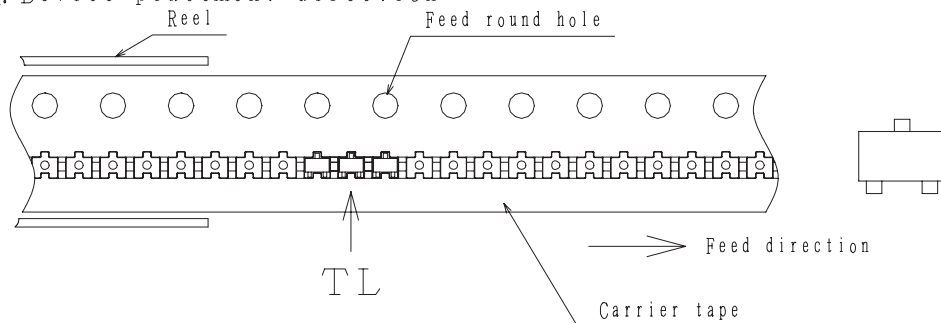


Those with oen electrode terminal on the feed hole side.....TL


# TF256TH

## Outline Drawing

TF256TH-3-TL-H, TF256TH-4-TL-H, TF256TH-5-TL-H

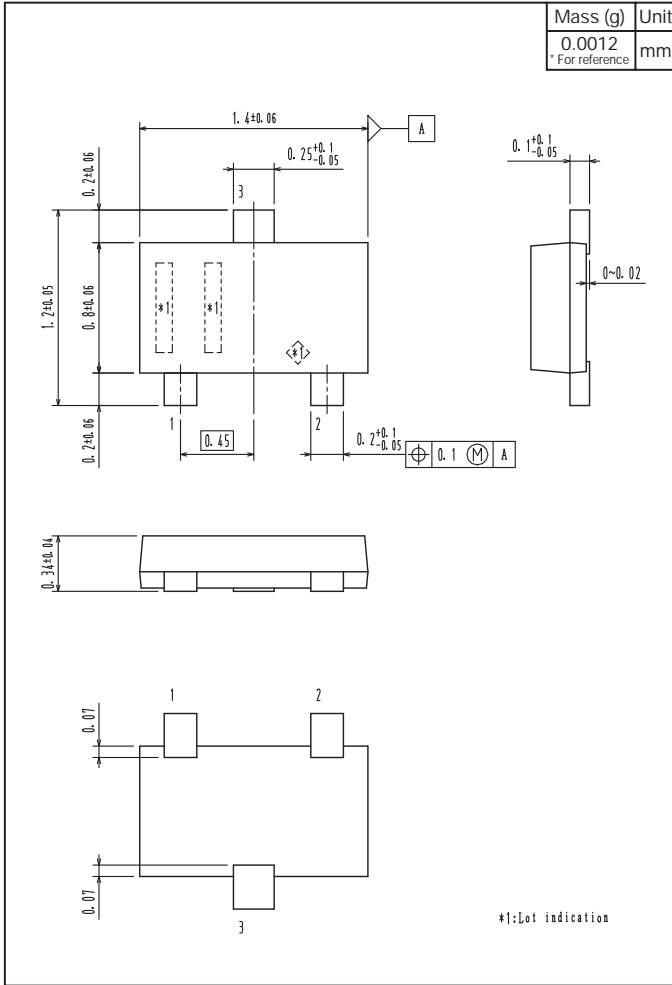

## Land Pattern Example

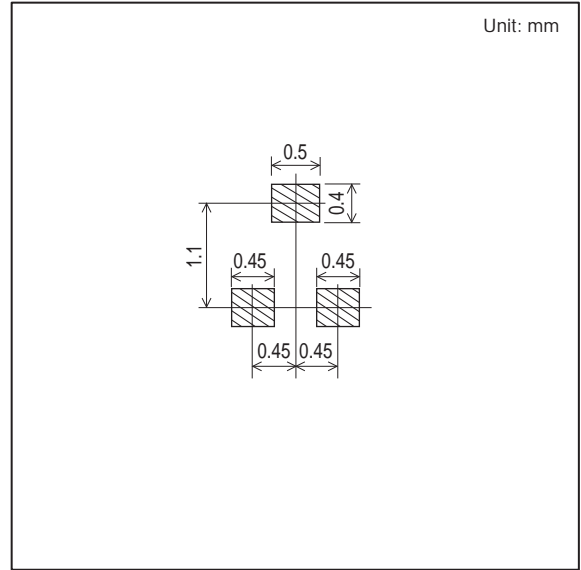

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[TF256TH-4-TL-H](#) [TF256TH-5-TL-H](#) [TF256TH-3-TL-H](#)